

22" LED FHD Monitor

MT-22-L (-NB)





Key Features

- True color display
- Resolution is up to at 1920*1080
- Wide view of field:178°(H)/ 178°(V)
- Specific menu design, which is simple to operate
- Support 7*24 working and lower power consumption
- Adaptively recognize signal
- VESA stand bracket
- Support multiply language

Specifications


Model	MT-22-L (-NB)
Display	
Display Type:	LED Backlight
Screen Size	21.5 Inch
Pixel Pitch(mm)	0.24825(H)*0.24825(V)
Max Resolution	1920*1080
Brightness (cd/m ²)	250
Contrast	3000:1
Response Time(ms)	7
Color	16.7M
Viewing Angle	Horizontal 178°, Vertical 178°
Refresh Rate	60Hz
Interface	
VGA	1
HDMI	1
OSD	
Multi-Language	8 (English, France, Spanish, German, Russia, Korea, Japanese, Simplified Chinese)
Mounting	
VESA	100mm*100mm
General	
Power Supply	DC 12V, 2A
Consumption	≤22 W(on) ≤0.5 W(Standby)
Operation Temperature	0°C ~ 40 °C/32°F ~ 104°F
Operating Humidity	20%~85% (No Condensation)
Storage Temperature	-10°C ~ 50°C/14°F ~ 122°F
Storage Humidity	0%~90% (No Condensation)
Dimension (W*H*D)	508.02 mm*392.87mm*200.00mm(With Pedestal)
Package(W*H*D)	566mm*382mm*116mm
Weight	Net Weight:2.3Kg(5.07Lb) Gross Weight:3.2Kg(7.5Lb)
Accessory	
Standard	HDMI Cable, Adapter, Pedestal, Quick Guide
Optional	Hanging Bracket(Model: HB-4022-A)

Dimensions

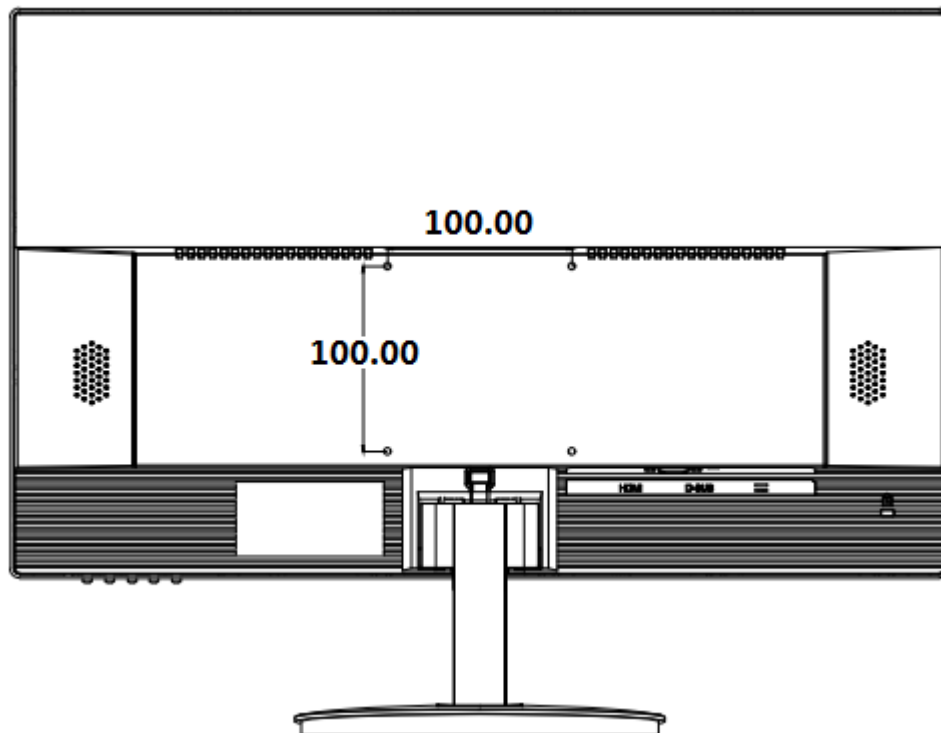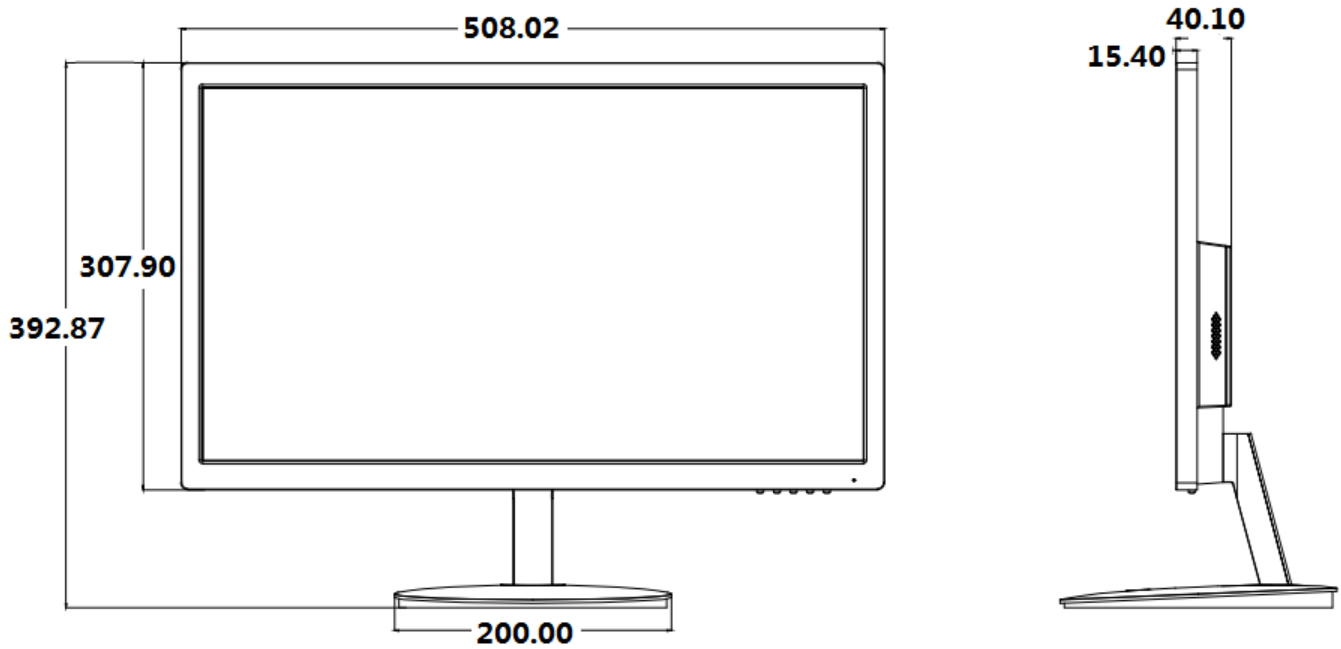


Interfaces


HDMI



VGA



DC



www.uniview.com/uniarch

©2022 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.